

Combi steamer  
**SpaceCombi®**  
 Electric combi steamer SpaceCombi® MagicPilot 6.1  
 MKN-No.: SKECOD610TG2



world of cooking

## Features

- **MagicPilot** – touch and slide operating concept robust, wear-free, capacitive true colour touch screen, protected behind anti-reflective safety glass; display cleaning mode
- **MKN Guided Cooking** with autoChef, ChefsHelp, VideoAssist, Favourites and BarcodeScan
- **autoChef** – automatic cooking
- More than 250 preselected international cooking processes which can be individually modified
- More than 350 cooking processes can be saved
- **Overview of individual favourites** on the start screen
- Cooking process protection against modification/deletion
- Adjustable language settings, full text search
- **ChefsHelp** – user information  
Insertion of information into text and graphics where required during the cooking process
- **VideoAssist** – interactive user assistance with clips featuring professional chefs
- Start cooking process with **BarcodeScan** in autoChef
- **Manual operation concept** with 12 cooking modes: SoftSteaming, Steaming, ExpressSteaming, Convection, CombiSteaming, Perfection, low temperature cooking,  $\Delta T$ , Sous vide, humidification, baking and rest function
- Cooking Steps function – up to 20 programme steps can be individually combined
- **SES** – Steam Exhaust System, steam extraction for safe operation
- **GreenInside** – energy consumption display
- **CombiDoctor** – self diagnosis programme automatic self-test for all relevant appliance functions such as climate and cleaning functions
- **FamilyMix** – efficient utilization of the cooking chamber capacity. Products which can be cooked in the same cooking chamber climate are indicated in a clearly arranged list showing which products belong together.
- **QualityControl** – consistent high quality; perfect results every time regardless of the load quantity
- **Hygienic cooking chamber door with sealed triple glazing**
- LED lighting integrated into the hygienic cooking chamber door
- Right hand hinged door
- **Hygienic cooking chamber** of corrosion resistant stainless steel

## Accessories

- Hanging rack for lengthwise insertion, standard configuration, 6 shelf inserts for GN 1/1, with tilt protection for containers, distance between insert levels 60 mm
- Mains connection cable as standard



SKECOD610TG2

## Option

- **WaveClean** – automatic cleaning system, siphon is included with the appliance
- **HoodIn** – integrated steam condensation
- Built-in version
- Left hand hinged door
- Special voltage
- Interface for connection to an energy optimization system according to DIN 18875 and potential free contact
- Potential free contact for external steam condensate hood
- ETHERNET interface
- Mains connection cable with 5-channel CEE plug 16 A

## Product safety




Combi steamer  
**SpaceCombi®**  
 Electric combi steamer SpaceCombi® MagicPilot 6.1  
 MKN-No.: SKECOD610TG2



world of cooking

SKECOD610TG2

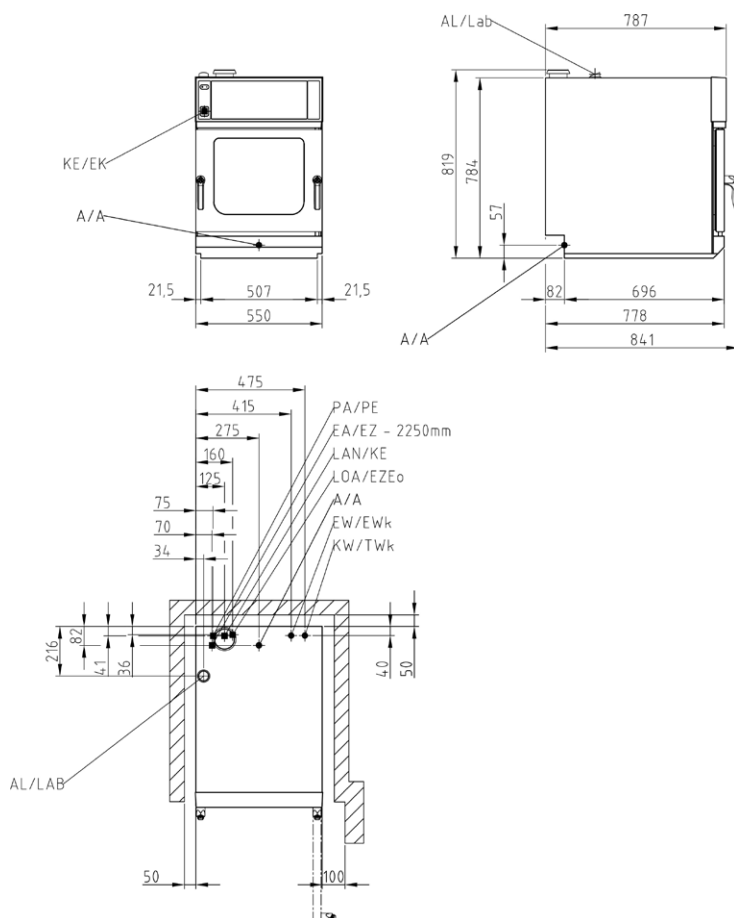

Please find detailed information at  
[www.mkn.com/en/login](http://www.mkn.com/en/login)

## General installation interfaces

### Interfaces provided on site

- Electricity connection (EA/EZ)
- Connection to cold water mains (KW/TWk)
- Soft water (EW/EWk)
- Waste water connection (A/A)
- Exhaust air (AL)

Appliance dimensions (LxWxH) (mm)	550 x 787 x 784
Housing material	1.4301
Built-in dimensions (LxWxH) (mm)	550 x 788 x 800
Dimensions incl. packing (LxWxH <sup>2</sup> )(mm)	800 x 970 x 1000
Net weight (kg)	76
Gross weight (kg)	91
<b>Installation instructions; safety clearance in mm</b>	
at the rear	50

Combi steamer  
**SpaceCombi®**  
 Electric combi steamer SpaceCombi® MagicPilot 6.1  
 MKN-No.: SKECOD610TG2



world of cooking

SKECOD610TG2

Capacity	
Shelf inserts	6
GN 1/1 (530 x 325 x 60 mm)	6
GN 1/1 (530 x 325 x 65 mm)	5
Plates Ø 28 cm on regeneration racks	12
Meals per day	30 - 80

Electricity supply (400 V)	
Nominal power consumption (kW)	7.8
Voltage (V)	400 3 (N)PE AC
Fuse protection (A)	3 x 16
Frequency range (Hz)	50 / 60

Drinking water cold (KW/TWk)	
Water pressure (bar)	2 - 6
Connection size	DN 20 (G ¾" A)
Quality mmol/l (°dH)	< 4 (22.2)
Consumption cleaning (l)	17.7

Soft water (EW/EWk)	
Water pressure (bar)	2 - 6
Connection size	DN 20 (G ¾" A)
Quality mmol/l (°dH)	< 0.9 (5)
Consumption steaming (l/h)	10
Consumption combisteaming (l/h)	2.2
Consumption cleaning (l)	1.3

Waste water (A/A)	
Volume flow max. (l/min.)	10
Connection size	DN 40
Quality	max. 95 °C

**According to VDI 2052 with a connection voltage of 400 V.**

Operated without HoodIn (integrated steam condensation)	
Heat emission latent (W)	1404
Heat emission sensitive (W)	936
Steam output (g/h)	2067
Operated with HoodIn (integrated steam condensation)	
Heat emission latent (W)	421
Heat emission sensitive (W)	936
Steam output (g/h)	620
Operated as built-in version with HoodIn	
Heat emission latent (W)	421
Heat emission sensitive (W)	936
Steam output (g/h)	620
Noise level (db (A))	< 65
Type of protection	IPX5



## Further features

- One hand door handle
- Non-contact door switch, door lock positions with end stop
- Insertable door seal – end user replaceable
- Drip pan with permanent drainage
- **DynaSteam** – dynamic process-oriented steam quantity adjustment depending on product load
- Dynamic autoreverse fan for extremely uniform cooking results
- 5 fan speeds programmable, even 10 speeds in connection with fan intervals
- Fan safety brake
- Manual cleaning programme with user guide
- Maintenance instructions for external water filters
- **Time2Serve** – enter the required completion time
- **RackControl** – multiple timer
- **ClimaSelect plus** – Climate control in steps of 10 %
- **Ready2Cook** – preheating, cooling down, climate preparation
- **PerfectHold** – keep warm function with SmartCoolDown
- Internal multipoint core temperature measurement (up to 99 °C)
- **EcoModus** – reduces temperature of cooking chamber automatically when it has not been charged for some time
- Energy supply as required
- Integrated HACCP memory
- **Professional baking function** – to set baking programmes with humidity injection in ml, a rest period and dehumidification
- Manual steam injection/humidification
- Timer with start time pre-selection and real time display
- USB interface, e.g. for software updates\*\*
- Cooking process import function using a USB stick
- Loudspeaker, adjustable tone control
- Audible signal after cooking time has elapsed
- Direct waste water connection according to DVGW is possible

## Special equipment

10022453	Cabinet frame open on all sides, 850 mm high
10026718	Cabinet frame open on all sides, 100 mm high
SK_MAGICHOOD	<b>MagicHood</b> – odour neutralizing hood (see separate data sheet)
10022519	SpaceCombi stacking kit

## GN 1/1 trays (please refer to accessories brochure)

10012901	Frying basket
202345	Granite enamelled tray, 20 mm deep
202379	Baking tray – perforated
206104	Grid
202375	Cup baking tray
10022525	Wall bracket
10014181	Barcode scanner including USB cable for charging
TWO_IN_ONE	WaveClean two-in-one cleaning cartridge
10022641	Hanging racks 5 x GN 1/1, distance between insert levels 65 mm

\*\* without surcharge under [www.mkn.com](http://www.mkn.com)

